



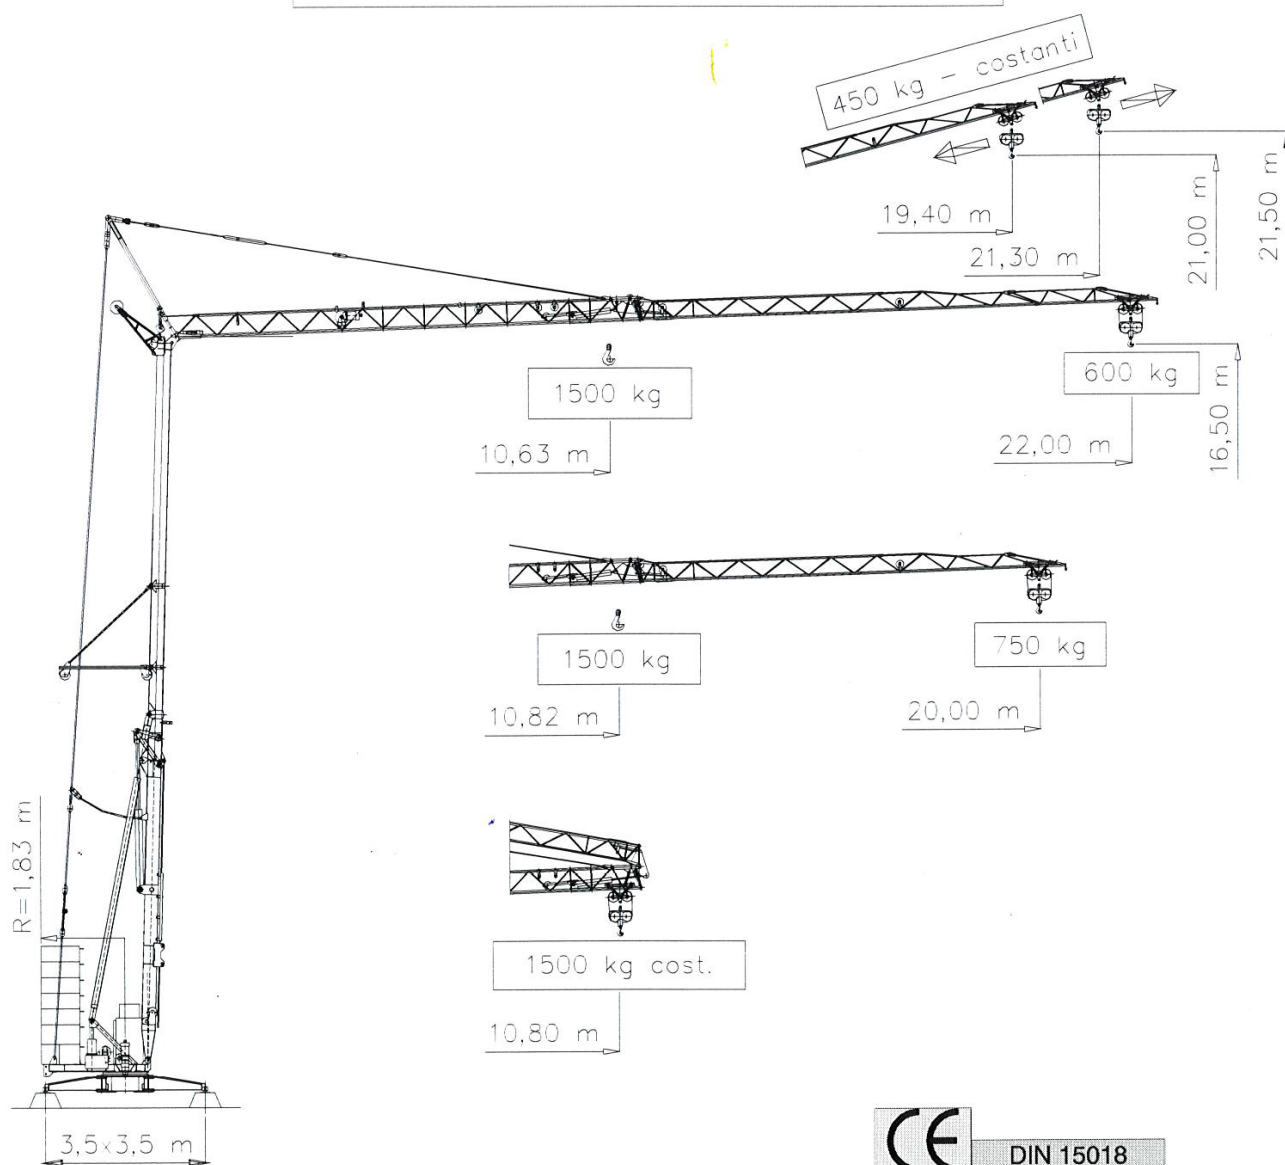


H.S. 22.06



Courbes de charges - Lastkurven - Load curves - Curve di carico



22 m		→ 10,63	12	14	16	18	20	22	m
		→ 1500	1295	1075	920	765	675	600	kg

20 m		→ 10,82	12	14	16	18	20	m
		→ 1500	1325	1100	940	785	750	kg

Flèche relevée - Ausleger in Steilstellung
Luffing jib - Braccio impennato

450 kg - cost.

Mécanismes - Antriebe Mechanisms - Meccanismi

M�chanismes - Antriebe Mechanisms - Meccanismi			m/min	kg	CV-PS hp	kW	
Levage Heben Hoisting Sollevamento	TRIFASE 1 	2 Vitesse Geschwind. Speed Velocit�		8,5	1500	3	2,2
				34	700	7	5,14
		3 Vitesse Geschwind. Speed Velocit�		4	1500	1,75	1,3
				17	1500	7,5	5,5
				34	700	7,5	5,5
	MONO-TRIFASE 2 	Trifase		14	1500	5,5	4
				22	900		
				32	600		
		Monofase		10	1500	5,5	4
				17	900		
				25	600		
Distribution - Katzfahren Trolleying - Carrello			28,5		1,5	1,1	
Orientation - Schwenken Slewing - Rotazione			0,85 rpm - g/min		3 daNm		
Puissance �lectrique n�cessaire - Anschlusswert Necessary electric power Potenza elettrica necessaria		380 V 50 hz 	Reseau - Netzstrom Mains supply - Potenza		220 V 3 kW	380 V 10 kW	
			Groupe �lectrog�ne Stromaggregat - Generator set Gruppo elettrogeno		Nous consulter Auf Anfrage - Consult us Consultarci		


Poids de construction sans essieux - Konstruktionsgewicht ohne Transportachse
Dead weight without transport axles - Peso della gru senza assali

5680 kg

Poids du lest - Ballastgewicht - Ballast weight - Peso zavorra rotante

10000 kg


Réactions - Eckdrucke - Reactions - Reazioni



R ● 9600 daN ■ 6500 daN

● En service	● In Betrieb	● In service	● In servizio
■ Pas en service	■ Ausser Betrieb	■ Out of service	■ Fuori servizio

Mode de transport - Transportart - Kind of transport - Soluzione di traino

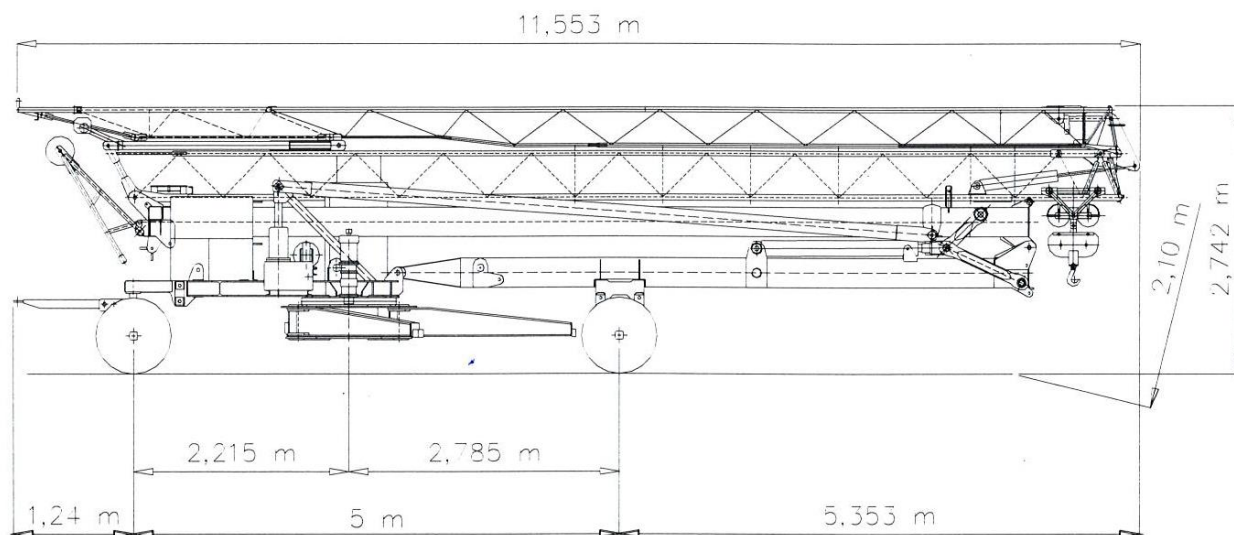

Montage - Montage - Erection - Montaggio

